

FOR YOUR GOOD LIFE.

BUILDDONE PRODUCT CATALOG VOL.02



Push Pull

BO-DP7200S
BO-DP7200SK



Push Pull (Fingerprint Scan)

BO-DP9100FS
BO-DP9100FSK



Specification

Power 6V DC 1.5V AA Alkaline Batteries (4-8EA)
Material Al Die Casting / ABS
Dimension(mm) 84(W) X 352(H) X 68(D)
Color Silver, Brown

Emergency Power Source 9V DC Alkaline Battery (6LF22) 1EA
Frequency 13.56MHz
Propagation A1D+F1D
Modulation ASK+FSK

Features



Push Pull Type

1 Step Unlock: Push from outside and pull from inside



New Era of Smart Doorlock with Voice Guidance

Voice guidance how to setup function is now available along with voice notification operating sound and status.



Anti-Panic System

Allows to open doors easily in case of emergency



Internal Temperature Sensor

Built-in Temperature Sensor (60±10°C detection) unlocks door automatically in case of fire

Mortise Lock

BO-DL5200S
BO-DL5200SK



Mortise Lock (Fingerprint Scan)

BO-DL6100FS
BO-DL6100FSK



Specification

Power	6V DC 1.5V AA Alkaline Batteries (4-8EA)
Material	Al Die Casting / ABS
Dimension(mm)	82(W) X 310(H) X 29(D)
Color	Silver, Brown

Emergency Power Source	9V DC Alkaline Battery (6LF22) 1EA
Frequency	13.56MHz
Propagation	A1D+F1D
Modulation	ASK+FSK

Features



Etiquette Mode (Silent Mode)
You can adjust and mute the volume key tone or operating sound for your family or neighborhood at late night.



Theft & Prank Warning
If you pull the door forcefully, the door lock sounds the alarm.



Internal Temperature Sensor
Built-in Temperature Sensor (60±10°C detection) unlocks door automatically in case of fire



New Era of Smart Doorlock with Voice Guidance
Voice guidance how to setup function is now available along with voice notification operating sound and status.



Hotel Lock

BO-DH2100
 BO-DH2100LAN
 BO-DH2100RTC



Features

- Fire detection alarm sensor
- Internal double locking system
- Two-way communication operating program (BO-DH2100LAN only)
- Access control with USB port smart key card encoder (BO-DH2100RTC)
- Efficient Management with the master card

Specification

Dimension(mm) Outer Body : 83.3(W) X 313.3(H) X 25(D)
 Inner Body : 81.2(W) X 313.2(H) X 41(D)
Color Dark Silver



Mortise Lock

BO-DL5300S
 BO-DL5300SK



Features

- Modern and stylish design
- Fake password input system to prevent your password being exposed
- Alarm system (Intrusion, Fire)
- Auto lock/double lock system
- Three-level alarm sound control (High, Mid, Low)
- Unlock the door remotely from video phone
- Access control for managers with dual master function

Specification

Dimension(mm) Outer Body : 83.3(W) X 313.3(H) X 23(D)
 Inner Body : 81.2(W) X 313.2(H) X 33(D)
Color Silver



Rim Lock

BO-DSC11 BO-DSC11S



Features

- Fake password input system to prevent your password being exposed
- White backlight applied on RF carder reader and key pad
- High voltage, fire and hacking prevention system
- Auto lock / double lock function
- Emergency Power (9V DC Alkaline Battery)
- Access control for managers with dual master function

Specification

Dimension(mm) Outer Body : 71.4(W) X 171.4(H) X 23.1(D)
Inner Body : 165(W) X 90(H) X 49.1(D)

Color Red, Silver



Rim Lock

BO-DST100 BO-DST100S BO-DST100SK



Features

- Fake password input system to prevent your password being exposed
- Access control for managers with dual master function
- High voltage, fire and hacking prevention system
- Auto lock / double lock function

Specification

Dimension(mm) Outer Body : 73.2(W) X 178(H) X 17.5(D)
Inner Body : 165(W) X 90(H) X 49.1(D)

Color Black



Rim Lock

BO-DST800FS BO-DST800FSK



Features

- Fake password input system to prevent your password being exposed
- Access control for managers with dual master function
- High voltage, fire and hacking prevention system
- Auto lock / double lock function
- Fingerprint Scan (Voice Guidance)
- Emergency Power (9V DC Alkaline Battery)

Specification

Dimension(mm) Outer Body : 73.2(W) X 178(H) X 23.6(D)
Inner Body : 165(W) X 90(H) X 49.1(D)

Color Black



RF Key Tag

BO-KT10 (Ring Type)

RFID

13.56MHz



RF Key Tag

BO-KT20 (Adhesive Type)

RFID

13.56MHz



Adaptor

DC12V2A

Features

- Regulated adaptor uses regulated IC
- Constant output voltage even the input voltage fluctuates.
- Suitable for small household appliances, digital instruments, measuring instruments, sound devices

Input

AC 85V ~ 260V / 47 ~ 440Hz

Output

DC12V

Current

2.0A

Usage

Used for products with current consumption 12V / 1A or more (IR Camera, Access control)



Wireless Module (Receiver)

BO-RX150

- Features
- Door unlocking signal receiver for video intercom
 - Remote Module


Compatible Model Push Pull / Mortise Lock

Wireless Interlocking Device (Transmitter)

BO-TX250

- Features
- Door unlocking signal transmitter for video intercom

Compatible Model Push Pull / Mortise Lock

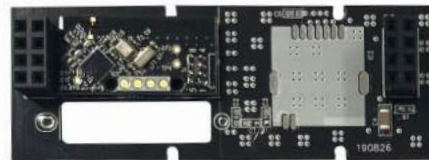

Bluetooth Module (Receiver)

BO-RX160

- Features
- Unlock the door remotely from smart phone

Compatible Model Push Pull / Mortise Lock



Bluetooth Module + RF Module (Receiver)

BO-RX170

- Features
- Unlock the door remotely from smartphone and video phone

Compatible Model Push Pull / Mortise Lock



Remote Control

BO-TX260

- Features
- Unlock the door with remote control

Compatible Model Push Pull / Mortise Lock



SBC  Venture Company

INNOBIZ Innovation Business



ISO 9001:2015 Certified

Customer Service / Place of purchase